

Perdite di carico Loss of head

Valvole di ritegno Check valves

SERIE O5

Diagramma perdite di carico con fluido H₂O - Head loss chart with H₂O fluid

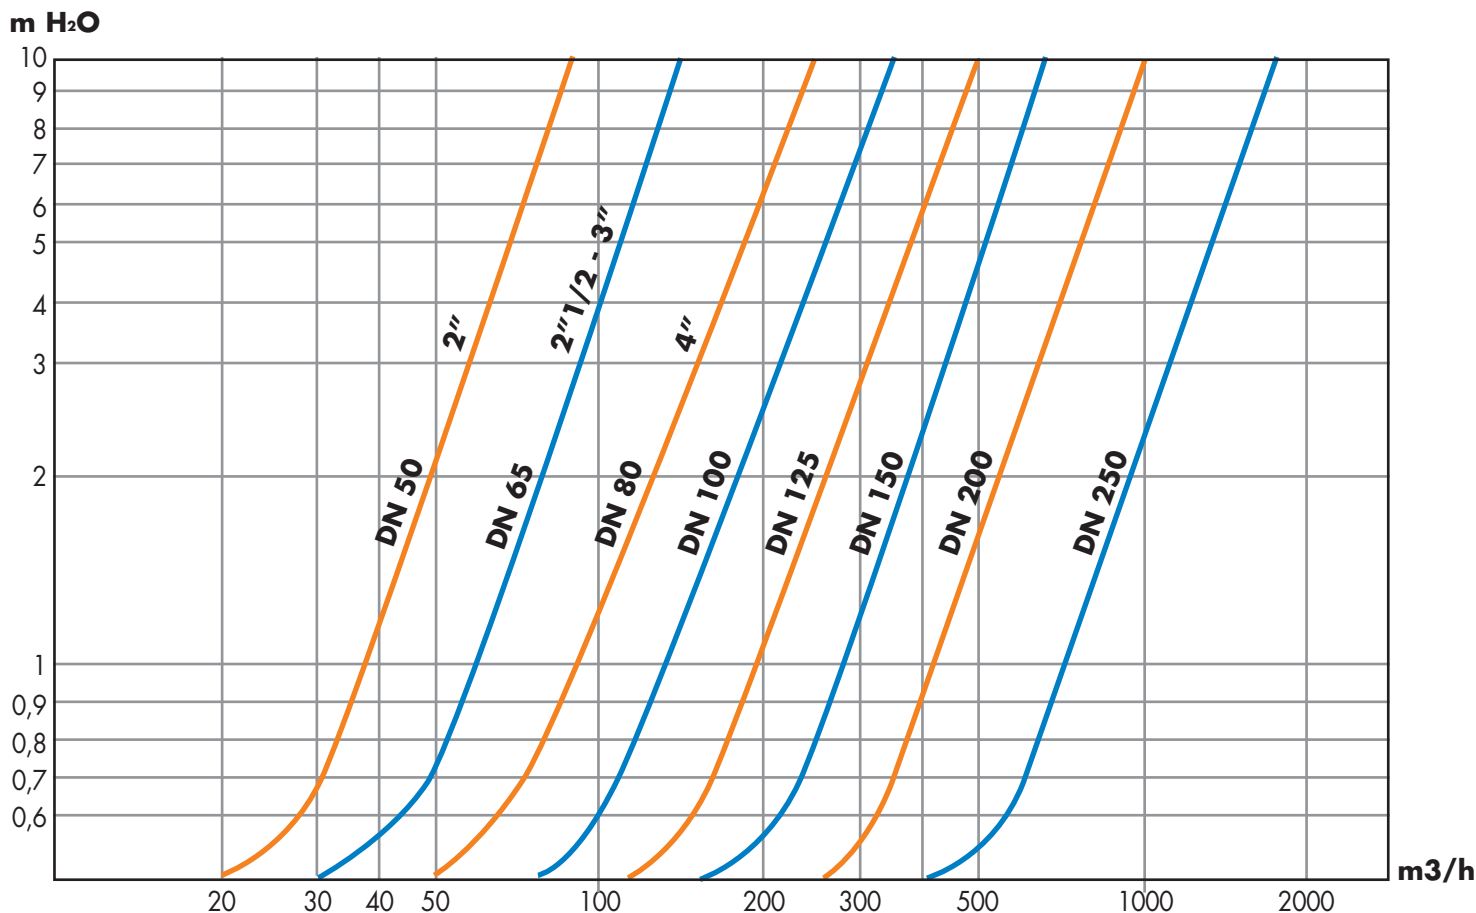


Tabella Kv - DN Kv - DN table

DN	50	65	80	100	125	150	200	250
KV m ³ /h	99	145	258	360	516	620	985	1620

Pressione minima di apertura mmH₂O - Minimum operating pressure mmH₂O

Direzione flusso

Flow direction

DN	50	65	80	100	125	150	200	250
	639	647	592	624	570	526	639	690
	382	316	280	318	180	165	221	204
	510	480	436	470	375	345	429	448
senza molla without spring	125	165	155	152	203	185	208	244

N.B. 1 m H₂O = 0,098 bar

I dati e le caratteristiche del presente stampato sono forniti a titolo indicativo

Data and features indicated in this brochure are just for information.

DT042

CA.05/12-2005/I-GB

Sede: Via Novara, 199 - 28078 Romagnano Sesia (No) ITALY

Tel. +39 0163 8281 11 - Fax +39 0163 8281 30

Sede logistica: Via Fantoli 15/1/i - Milano -

Tel. 02 58 010 514 - Fax 02 58 018 264

Internet: www.brandoni.it

