


# Perdite di carico Loss of head

## Valvole di ritegno Check valves

**SERIE O6/M6**

### Diagramma perdite di carico con fluido H<sub>2</sub>O - Head loss chart with H<sub>2</sub>O fluid

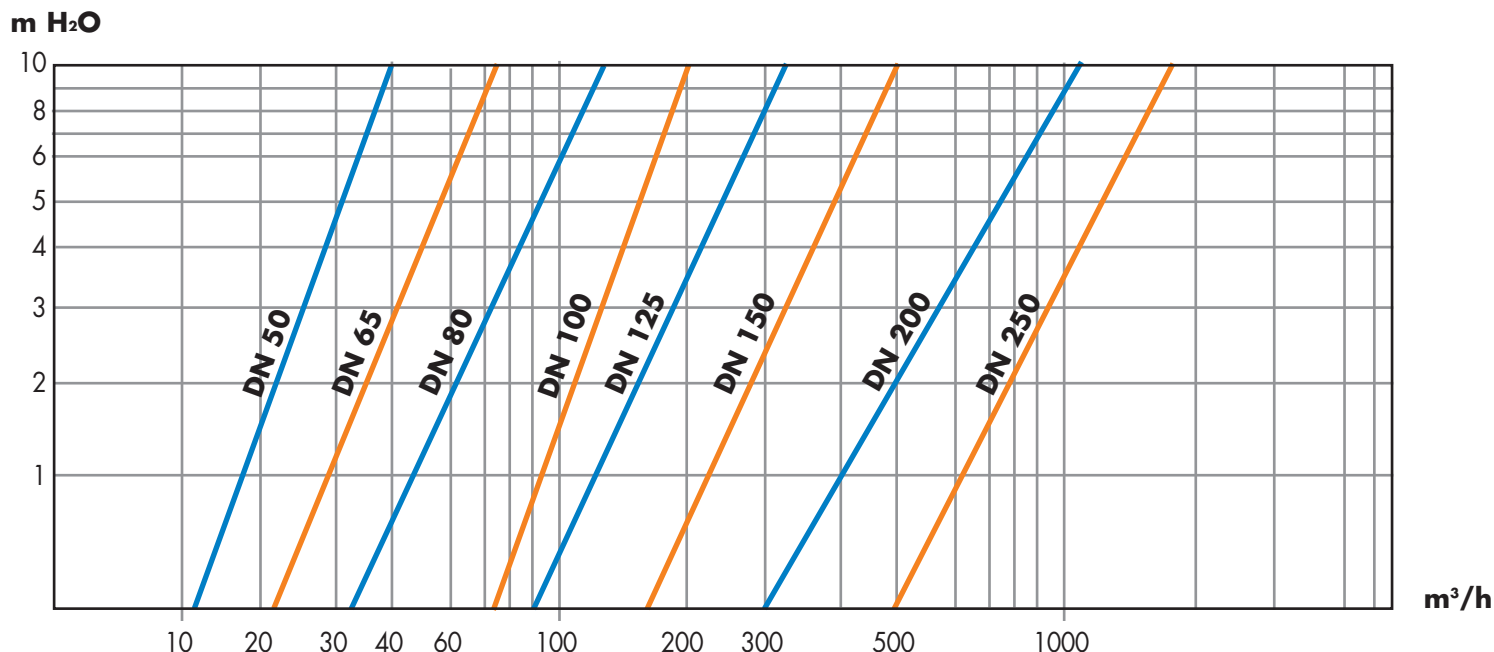

### Tabella Kv - DN Kv - DN table

DN	50	65	80	100	125	150	200	250
KV m <sup>3</sup> /h	41	75	140	208	341	525	1093	1670

### Pressione minima di apertura mmH<sub>2</sub>O - Minimum operating pressure mmH<sub>2</sub>O

Direzione flusso Flow direction	DN	50	65	80	100	125	150	200	250
		194	198	196	174	226	230	244	260
		58	60	44	38	26	32	26	18
		126	130	120	106	126	130	136	138
	senza molla without spring	70	70	76	68	100	100	110	122

**N.B. 1 m H<sub>2</sub>O = 0,098 bar**

I dati e le caratteristiche del presente stampato sono forniti a titolo indicativo  
Data and features indicated in this brochure are just for information.

DT043  
CA.06-M6/12-2005/I-GB

Sede: Via Novara, 199 - 28078 Romagnano Sesia (No) ITALY  
Tel. +39 0163 8281 11 - Fax +39 0163 8281 30  
Sede logistica: Via Fantoli 15/1/i - Milano -  
Tel. 02 58 010 514 - Fax 02 58 018 264  
Internet: www.brandoni.it

