

STRAINERS

"Y" strainers with plug Art. 11.000

- For water systems, heating, fire prevention
- Easy maintenance and cleaning


Strainer baskets

- To install on check valves (F5 or other flanged articles)
- Suitable for foot valve

Art. 50.000 Steel ZN

Art. 51.000 AISI 304

Art. 52.000 Threaded

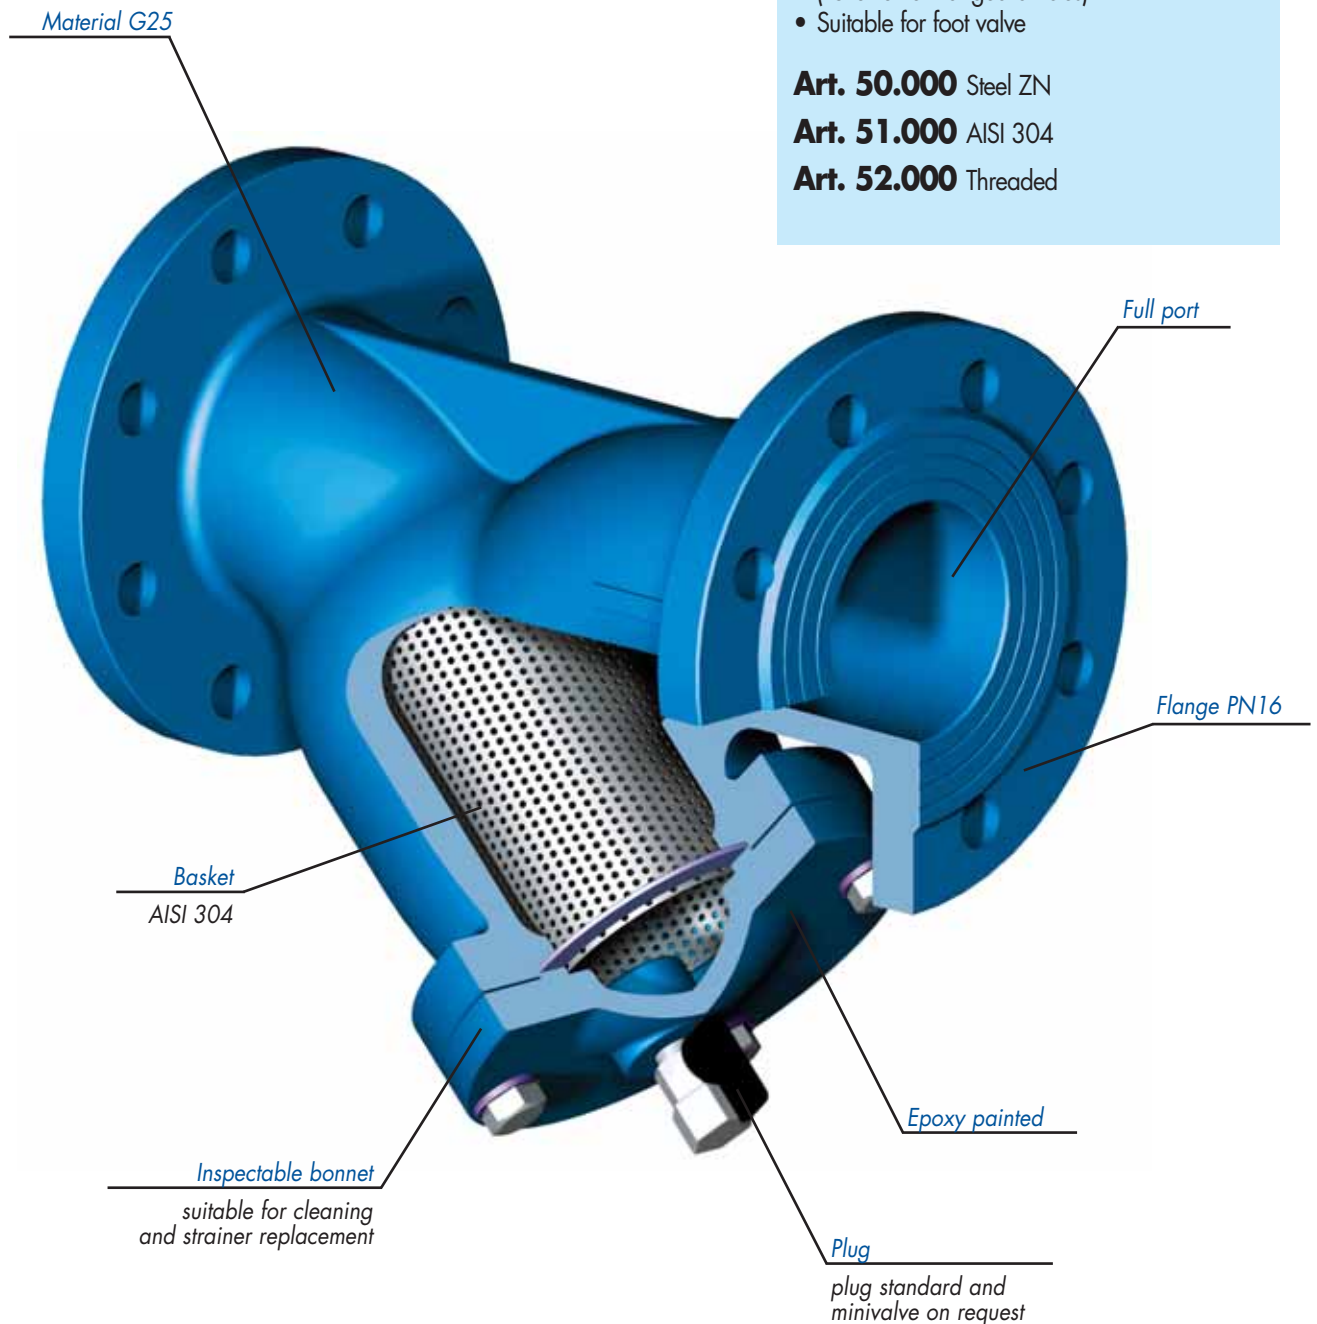

Face to face: EN 558 serie 1 DN 50÷200 (ex DIN 3202 F1)

Sede: Via Novara, 199 - 28078 Romagnano Sesia (No) ITALY
Tel. +39 0163 8281 11 - Fax +39 0163 8281 30
Internet: www.brandoni.it



STRAINERS

Data and specifications are only available as information. Brandoni S.p.A. reserves the right to modify one or more valve specifications without warning.

Filtri/12-2005/GB

Pressure: DN50÷DN300 PN16
DN 350 PN 10

Temperature: 100°C

articles available

"Y" strainers with plug

Art. 11.000

body:

GG25 Cast iron

Face to face:
DIN 3202 F1
Flanges:
DIN 2501
PN 16
UNI 2223/67

- Pressure: 0÷16 bar
- Temperature: 100°C Max

- Strainer: AISI 304

- Epoxy painted inside/outside



Strainer baskets

Art. 50.000

material:

Acciaio zincato

- Flange. Suitable for flange PN16 - PN10.

- Surface finish: ZN plated



Art. 50.000 Art. 51.000
Art. 52.000

Art. 52.000

material:

AISI 304

- Flange. Suitable for flange PN16 - PN10.

- On request AISI 316

Art. 51.000

material:

AISI 304

- Threaded end union (in nylon)

technical data

Art. 11.000 Dimensions (in mm)

DN	50	65	80	100	125	150	200	250	300	350
L	230	290	310	350	400	480	600	650	770	950
H	135	170	180	225	282	325	383	470	595	735
Ø Hole	1,5	1,5	1,5	1,5	1,5	1,5	1,5	2	2	2
Weight (Kg)	9,4	18,8	23,4	29,8	51,4	70,2	116,5	182,2	291	348

Art. 50.000 / 52.000 / 51.000 Dimensions (in mm)

DN	50	65	80	100	125	150	200	250
Ø A Hole	6	6	6	6	6	6	6	6
Ø B Hole	1,1	1,4	1,4	1,4	-	-	-	-
D	111	131	148	168	198	222	278	329
D ₁	62	81	93	117	-	-	-	-
E	156	176	202	212	242	276	332	385
L	80	100	120	150	175	200	250	300
L ₁	85	85	105	118	-	-	-	-
Weight (Kg)	0,55	0,74	0,93	1,2	1,6	2,2	3,2	4,4

